

Metal Film Resistors, Military/Established Reliability, MIL-PRF-39017 Qualified, Type RLR



FEATURES

- Meets requirements of MIL-PRF-39017
- Failure Rate: Verified Failure Rate (Contact factory for current level)
- Epoxy coated construction provides superior moisture protection
- Traceability of materials and processing
- Monthly lot acceptance testing
- Very low noise (- 40 dB)
- Extensive stocking program at distributors and factory in $\pm 1\%$ and $\pm 2\%$ tolerances
- Vishay Dale has complete capability to develop specific reliability programs designed to customer requirements

STANDARD ELECTRICAL SPECIFICATIONS							
VISHAY DALE MODEL	MIL-PRF-39017 STYLE	POWER RATING $P_{70^\circ C}, W$	RESISTANCE RANGE ¹⁾ Ω	RESISTANCE TOLERANCE %	TEMPERATURE COEFFICIENT ppm/°C	MAXIMUM WORKING VOLTAGE	LIFE FAILURE RATE**
ERL05	RLR05	0.125	4R7 - 1M0	$\pm 1, \pm 2$	100	200	M, P, R, S
ERL07	RLR07	0.25	1R0 - 10M	$\pm 1, \pm 2$	100	250	M, P, R, S
ERL20	RLR20	0.50	4R3 - 3M01	$\pm 1, \pm 2$	100	350	M, P, R
ERL32	RLR32	1.0	1R0 - 2M7	$\pm 1, \pm 2$	100	500	M, P, R

¹⁾ Extended Resistance Range: DSCC has created a series of drawings intended to support extended resistance ranges left otherwise void by the discontinuation of MIL-R-39008 RCR carbon composition resistors. Vishay Dale is listed as a resource on these drawings as follows:

DSCC DRAWING NUMBER	VISHAY DALE MODEL	POWER RATING $P_{70^\circ C}, W$	RESISTANCE RANGE Ω	RESISTANCE TOLERANCE %	TEMPERATURE COEFFICIENT ppm/°C	MAXIMUM WORKING VOLTAGE
98020	ERL05..36, ERL05..37*	0.125	1M1 - 22M	$\pm 2, \pm 5, \pm 10$	350	200
99011	ERL07..100, ERL07..101*	0.25	11M - 22M	$\pm 2, \pm 5, \pm 10$	350	250
98021	ERL20..36, ERL20..37*	0.50	3M3 - 22M	$\pm 2, \pm 5, \pm 10$	350	350
98022	ERL32..36, ERL32..37*	1.0	3M0 - 22M	$\pm 2, \pm 5, \pm 10$	350	350
97004	ERL62..1, ERL62..2*	2.0	10R - 2M7 3M0 - 22M	$\pm 1, \pm 2, \pm 5, \pm 10$	100 350	500

These drawings can be viewed at: www.dscclia.mil/Programs/MilSpec/ListDwgs.asp?DocType=DSCCdwg

* Hot solder dipped leads

** Consult Factory for current QPL failure rates

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	CONDITION
Voltage Coefficient, max.	ppm/°C	5/Volt when measured between 10 % and full rated voltage
Dielectric Strength	V_{AC}	RLR05 = 300; RLR07 and RLR20 = 500; RLR32 = 1000
Insulations Resistance	Ω	$\geq 10^9$ minimum dry; $\geq 10^{11}$ minimum after moisture test
Operating Temperature Range	°C	- 65/+ 150
Terminal Strength	lb	2lb pull test on RLR05; 5lb pull test on all other sizes
Solderability		Continuous satisfactory coverage when tested in accordance with MIL-STD-202, Method 208
Weight	g	RLR05 = 0.11; RLR07 = 0.35; RLR20 = 0.75; RLR32 = 1.50

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: RLR07C3001FRR36 (preferred part numbering format)

R	L	R	0	7	C	3	0	0	1	F	R	R	3	6			
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--


MIL STYLE	LEAD MATERIAL	RESISTANCE VALUE	TOLERANCE CODE	FAILURE RATE	PACKAGING	SPECIAL
RLR05 RLR07 RLR20 RLR32	C = Solderable/ Weldable	3 digit significant figure, followed by a multiplier 1R00 = 1.0 Ω 3302 = 33 k Ω 1005 = 10 M Ω	F = $\pm 1\%$ G = $\pm 2\%$	M = 1.0%/1000 h P = 0.1%/1000 h R = 0.01%/1000 h S = 0.001%/1000 h	B14 = Tin/Lead, Bulk R36 = Tin/Lead, T/R (Full, except 32's) R64 = Tin/Lead, T/R (Full; 32's only) RE6 = Tin/Lead, T/R (1000 pcs)	Blank = Standard (Dash Number) (up to 3 digits) From 1-999 as applicable 1 = Hot Solder Dip (32's) 11 = Hot Solder Dip (20's) 19 = Hot Solder Dip (05's) 23 = Hot Solder Dip (07's)

Historical Part Number example: RLR07C3001FR (will continue to be accepted)

RLR07	C	3001	F	R	R36
MIL STYLE	LEAD MATERIAL	RESISTANCE VALUE	TOLERANCE CODE	FAILURE RATE	PACKAGING



DIMENSIONS in inches [millimeters]

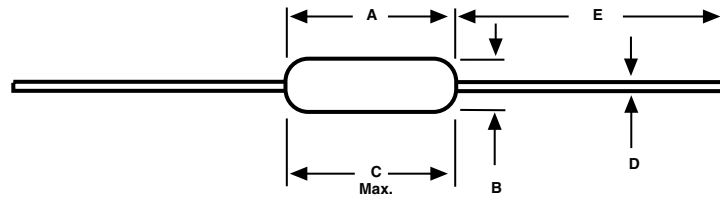

* 1.08 ± 0.125 [27.43 ± 3.18] IF TAPE AND REEL

VISHAY DALE MODEL	A	B	C (Max.)	D	E
ERL05	0.150 ± 0.020 [3.81 ± 0.51]	0.066 ± 0.008 [1.68 ± 0.21]	0.187 [4.75]	0.016 ± 0.002 [0.41 ± 0.05]	1.25 ± 0.266 [31.75 ± 6.76]
ERL07	0.250 ± 0.031 - 0.046 [6.35 ± 0.79 - 1.17]	0.090 ± 0.008 [2.29 ± 0.21]	0.300 [7.62]	0.025 ± 0.002 [0.64 ± 0.05]	1.50 ± 0.125 [38.10 ± 3.18]
ERL20	0.375 ± 0.041 [9.53 ± 1.04]	0.138 ± 0.023 [3.51 ± 0.58]	0.450 [11.43]	0.032 ± 0.002 [0.81 ± 0.05]	1.50 ± 0.125 [38.10 ± 3.18]
ERL32	0.562 ± 0.031 [14.27 ± 0.79]	0.190 ± 0.015 [4.83 ± 0.38]	0.625 [15.87]	0.032 + 0.002 - 0.001 [0.81 + 0.05 - 0.03]	1.50 ± 0.125 [38.10 ± 3.18]
ERL62	0.562 + 0.031 - 0.042 [14.27 + 0.79 - 1.07]	0.230 ± 0.015 [5.84 ± 0.38]	0.650 [16.51]	0.032 + 0.002 - 0.001 [0.81 + 0.05 - 0.03]	1.50 ± 0.125 [38.10 ± 3.18]

MATERIAL SPECIFICATIONS

Element:	Vacuum-deposited nickel-chrome alloy	Encapsulation:	Specially formulated epoxy compound
Core:	Fire-cleaned high purity ceramic	Termination:	Standard lead material is solder-coated copper Solderable and weldable per MIL-STD-1276, Type C.

APPLICABLE MIL-SPECIFICATIONS

MIL-PRF-39017:

The ERL series meets the electrical, environmental and dimensional requirements of MIL-PRF-39017.

MIL-PRF-22684:

MIL-PRF-39017 supercedes MIL-PRF-22684 on new designs. The ERC series meet or exceed MIL-PRF-22684 requirements.


Documentation:

Qualification and failure rate verification test data is maintained by Vishay Dale and is available upon request. Lot traceability and identification data is maintained by Vishay Dale for five years.

POWER RATING

Power ratings are based on the following two conditions:

- ± 2.0 % maximum R in 2000 hours load life
- + 150 °C maximum operating temperature

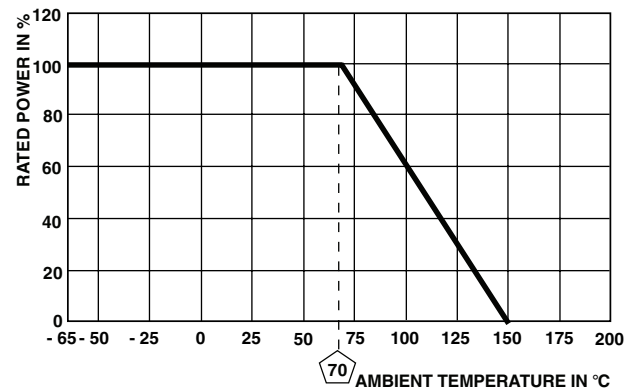

DERATING

CAGE CODE: 91637

MARKING

- Per MIL-PRF-39017



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.